# **Product datasheet**

Specifications





# discrete input module Modicon Quantum - 16 I - 230 V AC

140DAI74000

- () Discontinued on: Oct 1, 2023 AD
- (!) To be end-of-service on: Dec 31, 2030 AD

① Discontinued - Service only

### Main

Range Of Product	Modicon Quantum automation platform
Product Or Component Type	VAC discrete input modules
Software Name	Concept ProWORX 32 Unity Pro
Discrete Input Number	16

## Complementary

Group Of Channels	16
Addressing Requirement	1 input word
Discrete Input Voltage	230 V AC
Input Current	11.5 mA at 5763 Hz 9.7 mA at 4753 Hz
Voltage State 1 Guaranteed	165264 V AC at 5763 Hz 175264 V AC at 4753 Hz
Voltage State 0 Guaranteed	040 V AC at 5763 Hz 040 V AC at 4753 Hz
Input Impedance	26500 Ohm capacitive at 5763 Hz 31800 Ohm capacitive at 4753 Hz
Network Frequency Limits	4763 Hz
Maximum Leakage Current	2.6 mA
Absolute Maximum Input	264 V continuous 300 V 10 s 400 V 1 cycle
Response Time	4.90.75 ms x line cycle Off-On 7.312.3 ms On-Off
Isolation Between Channels	1780 Vrms for 1 minute
Isolation Between Channels And Bus	1780 Vrms for 1 minute
Bus Current Requirement	180 mA
Maximum Power Dissipation In W	5.5 W
Local Signalling	1 LED (green) for bus communication is present (Active) 1 LED (red) for external fault detected (F) 16 LEDs (green) for input status
Marking	CE
Module Format	Standard

Net Weight

### Environment

Standards	UL 508 CSA C22.2 No 142
Product Certifications	FM Class 1 Division 2 cUL
Resistance To Electrostatic Discharge	4 kV contact conforming to IEC 801-2 8 kV on air conforming to IEC 801-2
Resistance To Electromagnetic Fields	10 V/m 802000 MHz conforming to IEC 801-3
Ambient Air Temperature For Operation	060 °C
Ambient Air Temperature For Storage	-4085 °C
Relative Humidity	95 % without condensation
Operating Altitude	<= 5000 m

# **Packing Units**

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	16.3 cm
Package 1 Width	4.5 cm
Package 1 Length	31.2 cm
Package 1 Weight	450.0 g
Unit Type Of Package 2	S03
Number Of Units In Package 2	7
Package 2 Height	30.0 cm
Package 2 Width	30.0 cm
Package 2 Length	40.0 cm
Package 2 Weight	3.724 kg

# **Contractual warranty**

Warranty

18 months

# Sustainability Screen Premium

**Green Premium<sup>TM</sup> label** is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO<sub>2</sub> products.

**Guide to assessing product sustainability** is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >



RoHS/REACh

### Well-being performance

Reach Free Of Svhc

Mercury Free

Rohs Exemption Information Yes

### **Certifications & Standards**


Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
China Rohs Regulation	China RoHS declaration
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins
Circularity Profile	End of Life Information

# **Product datasheet**

### **Dimensions Drawings**

### **Racks for Modules Mounting**

#### **Dimensions of Modules and Racks**

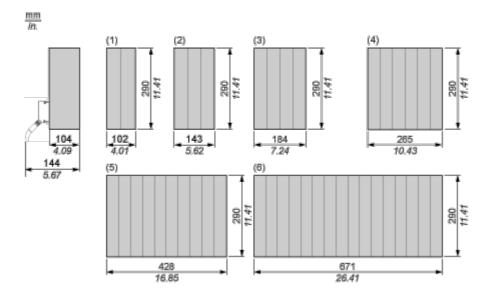


- (1) 2 slots
- (2) 3 slots
- (3) 4 slots
- (4) 6 slots
- (5) 10 slots
- (6) 16 slots

Connections and Schema

#### 230 Vac Discrete Input Module

#### Wiring Diagram

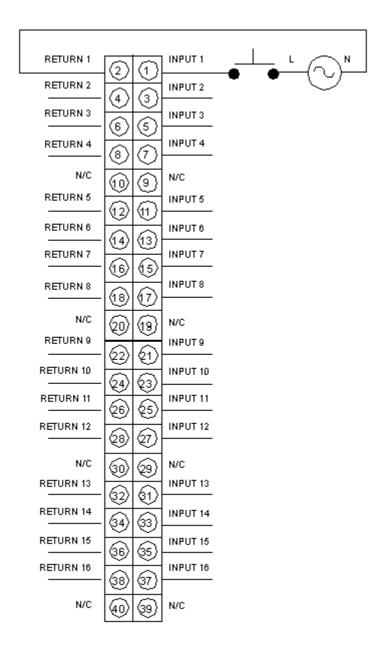

N/C Not Connected